


LANKO

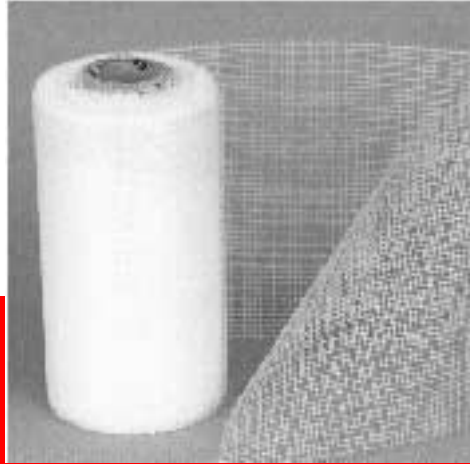

CHARACTERISTICS

- **Alkali resistant.**
- **Improve mechanical strength.**
- **Foot trafficable.**
- **Ensure the continuity of membrane.**
- **Bridging cracks.**

PACKAGING

- 1.2x100 m/roll.
- 1.2x10 m/roll.

STORAGE

Stored in cool and dry condition.

DESCRIPTION

ARMATURE RM is a fiber glass mesh used as reinforcement in liquid waterproofing systems to strengthen in all liquid membrane such as acrylic-copolymers, polyurethane, bituminous where are subjected to foot traffic or to improve the performance of flexible waterproofing mortars. ARMATURE RM is used with skim coat for bridging cracks and for the junction of different materials.

USES

ARMATURE RM can be used as a reinforcement in Waterproofing systems :

- 451 LANKOROOF
- 452 DAPMFLEX
- 453 K10 PLUS
- 226 ERTOFLEX
- 228 LANKOLASTIC

Skim coat :

- 101 PARENDUIT
- 110 LANKOSKIM

SPECIFICATIONS

- Weight : 60 g/m²
- Thickness : 0.13 mm.
- Tensile strength : 180 N/25x200 mm.
- Color : White
- Appearance : Mesh fabric
- Putridity : Rot proof
- Water solubility : Insoluble
- Polymer coating : >15% by weight of product

WORK INSTRUCTIONS

- ARMATURE RM should be laid on the freshly applied layer of liquid waterproofing coating or skim coating.
- Use roller or squeegee to press ARMATURE RM onto the coating whilst it is still wet
- Apply the intermediate and final coat by following the instruction of the coating's manufacturer.